


- 5 ACCEPTABLE PROTECTION/RETENTION MAT AS RECOMMENDED OR NEEDED.
- 4 ACCEPTABLE SEPARATION LAYER AS RECOMMENDED OR NEEDED.
- 3 ACCEPTABLE HIGH DENSITY XEPS INSULATION AS RECOMMENDED
- 2 ALT R230 WATERPROOFING MEMBRANE APPLIED OVER PRIMED SUBSTRATE.
- 1 ACCEPTABLE STRUCTURAL SUBSTRATE PREPARED & PRIMED.
- 6 ACCEPTABLE GREEN ROOF SOLID DRAINAGE CORE AS RECOMMENDED.
- 7 ACCEPTABLE GEOTEXTILE FILTER FABRIC AS RECOMMENDED.
- 8 ACCEPTABLE GROWING MEDIA AS RECOMMENDED.
- 9 ACCEPTABLE GREEN ROOF PLANTINGS AS RECOMMENDED OR NEEDED.

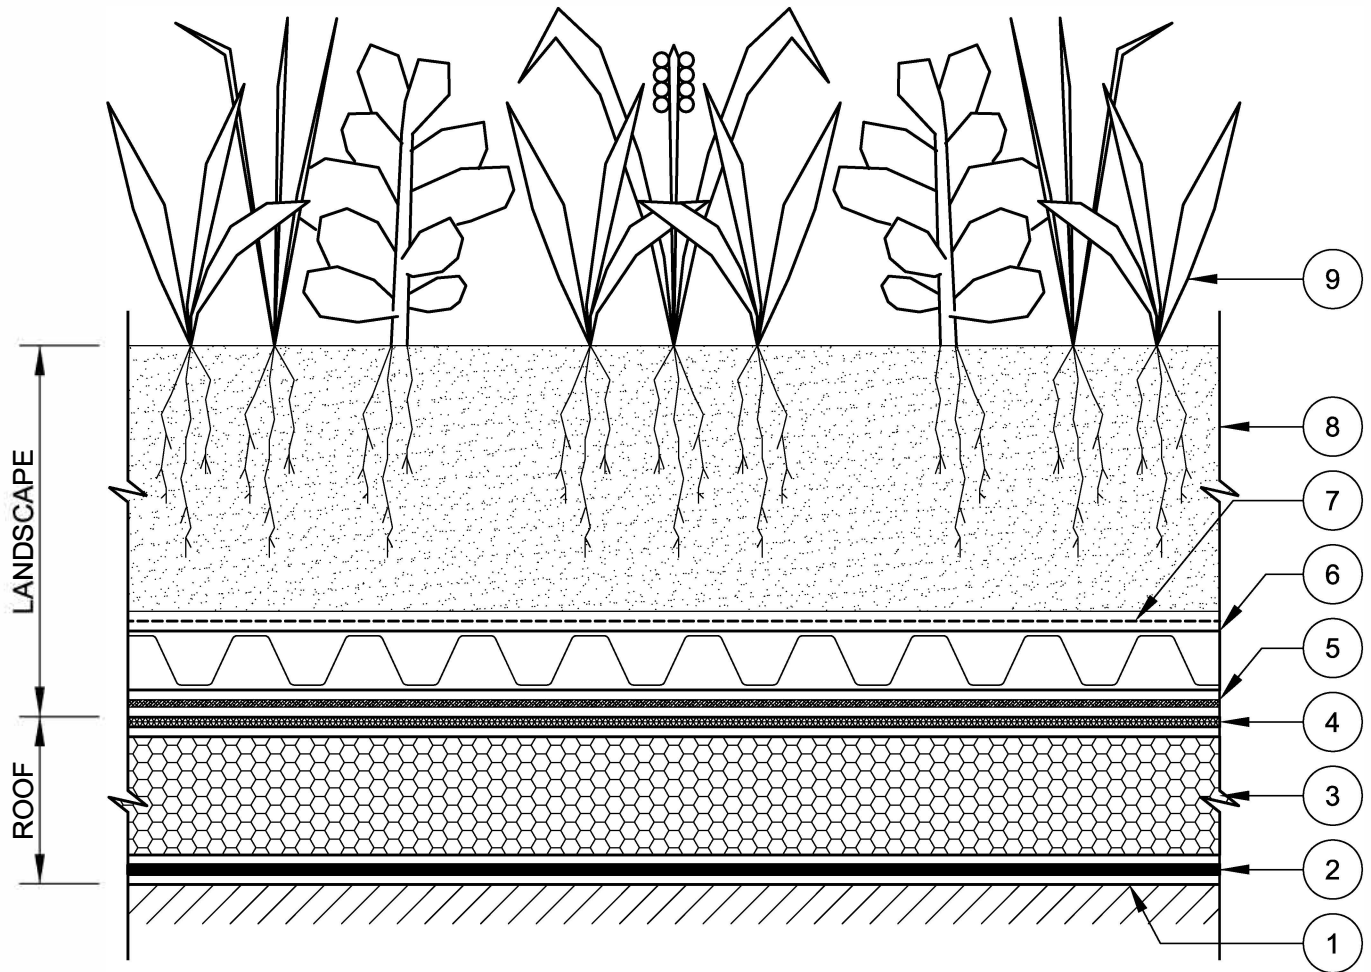

### TYPICAL GREEN ROOF ASSEMBLY

DRAWING NO.:

**G-A1**

REVISION  
0

ISSUE DATE  
10-15-2014

SCALE  
N.T.S.

DRAWN BY  
ALT Global

GE\_A01