


NOTE:
 SIZE WIDTH OF DE-BONDING TAPE TO PROVIDE UN-ADHERED AREA MINIMUM 5 TIMES LARGER THAN THE MAXIMUM ANTICIPATED EXPANSION. MEMBRANE COVER STRIP MUST EXTEND PAST DE-BONDING TAPE 2" MINIMUM ALL SIDES (TYP.)

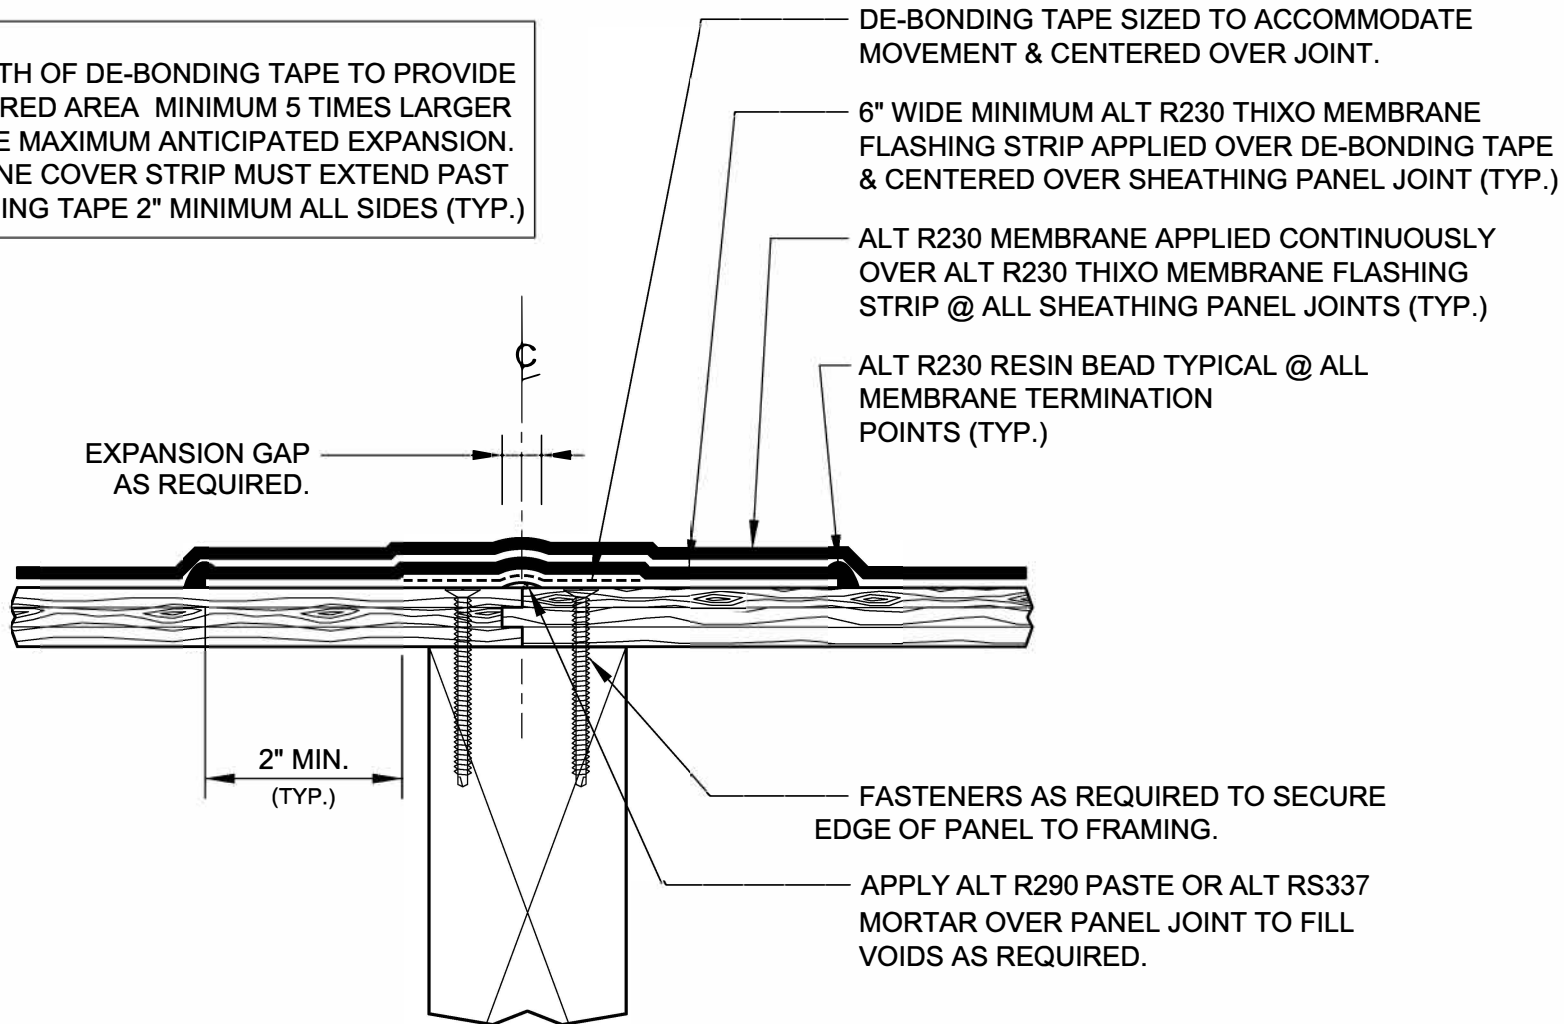

DE-BONDING TAPE SIZED TO ACCOMMODATE MOVEMENT & CENTERED OVER JOINT.

6" WIDE MINIMUM ALT R230 THIXO MEMBRANE FLASHING STRIP APPLIED OVER DE-BONDING TAPE & CENTERED OVER SHEATHING PANEL JOINT (TYP.)

ALT R230 MEMBRANE APPLIED CONTINUOUSLY OVER ALT R230 THIXO MEMBRANE FLASHING STRIP @ ALL SHEATHING PANEL JOINTS (TYP.)

ALT R230 RESIN BEAD TYPICAL @ ALL MEMBRANE TERMINATION POINTS (TYP.)

EXPANSION GAP AS REQUIRED.

2" MIN. (TYP.)

FASTENERS AS REQUIRED TO SECURE EDGE OF PANEL TO FRAMING.

APPLY ALT R290 PASTE OR ALT RS337 MORTAR OVER PANEL JOINT TO FILL VOIDS AS REQUIRED.

T&G SHEATHING PANEL JOINT DETAIL

REVISION	0	ISSUE DATE	10-15-2014	SCALE	N.T.S.	DRAWN BY	ALT Global
----------	---	------------	------------	-------	--------	----------	------------

