


**NOTE:**

1. SIZE WIDTH OF DE-BONDING TAPE TO PROVIDE UN-ADHERED AREA MINIMUM 5 TIMES LARGER THAN THE MAXIMUM ANTICIPATED EXPANSION. MEMBRANE COVER STRIP MUST EXTEND PAST DE-BONDING AS INDICATED BELOW (TYP.)
2. APPLY ALT PRIMER 276 TO ALL HORIZONTAL & VERTICAL SURFACES OF PREPARED RECESS.
3. INSTALL NEW JOINT SYSTEM DURING MEDIAN TEMPERATURES TO AVOID RAISED LOOP WHEN DECK EXPANDS DURING HIGH TEMPERATURES.

DO NOT APPLY ALT R268 TEXTURED COATING & ALT RS242 MORTAR OVER BOND BREAKER (TYP.)

HOLD BACK ALT R268 TEXTURED COATING & ALT RS242 MORTAR 1/2" (1.27CM) FROM EDGE OF DE-BONDING TAPE (TYP.)

MAX. 2" (5 CM) WIDE JOINT GAP

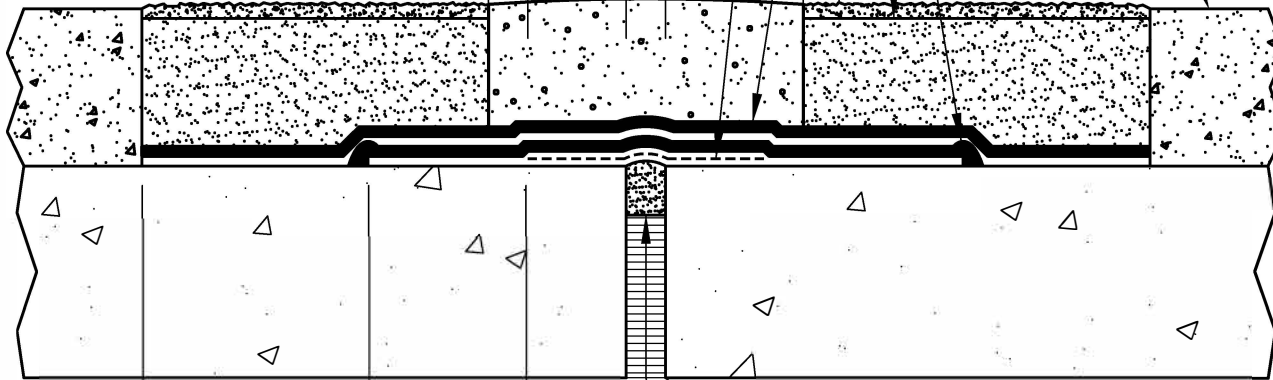

ACCEPTABLE JOINT FILLER AS REQUIRED (BY OTHERS)

DE-BONDING TAPE SIZED TO ACCOMMODATE MOVEMENT & CENTERED OVER JOINT.

2-PLY ALT R230 MEMBRANE STEPPED FLASHING STRIP APPLIED OVER DE-BONDING TAPE & CENTERED OVER JOINT IN CONCRETE (TYP.)

ALT R268 TEXTURED COATING TRAFFIC SURFACING APPLIED BOTH SIDES OF JOINT OVER ALT RS242 MORTAR (TYP.)

ALT RS242 MORTAR APPLIED OVER ALT R230 MEMBRANE FLASHING.

ALT R230 RESIN BEAD TYPICAL @ ALL MEMBRANE TERMINATION POINTS (TYP.)

EXISTING ASPHALT WEARING COURSE TO REMAIN (TYP.)

3" MIN.  
(TYP.)

2" MIN.  
(TYP.)

PREFORMED COMPRESSIBLE FILLER OR BACKER ROD SIZED FOR OPENING.

FILL VOID @ CONCRETE JOINT WITH ALT RS337 MORTAR OR ALT RS242 MORTAR AS REQ'D.

DRAWING NO.:

**TD-J2**

TD\_01E

**TRAFFIC CONTROL JOINT FLASHING**

DRAWN BY  
**ALT Global**

SCALE  
N.T.S.

ISSUE DATE  
12-15-2014

REVISION  
0



**ALT**