


ALT R230 RESIN BEAD TYPICAL @ ALL MEMBRANE TERMINATION POINTS.

ALT RS337 MORTAR W/ALT R268 TEXTURED COATING TRAFFIC SURFACING.

ALT R230 MEMBRANE APPLIED CONTINUOUSLY OVER DECK SUBSTRATE (TYP.)

(1) PLY ALT R230 THIXO MEMBRANE FLASHING EXTEND HORIZONTAL 6" MINIMUM ON SLAB & TIE-ON DRAIN BODY 1" MINIMUM AS SHOWN.

PREPARE, LEVEL & PATCH SUBSTRATE AS REQUIRED W/ALT RS242 OR RS337 MORTAR AFTER PRIMING & PRIOR TO APPLYING ALT R230 MEMBRANE (TYP.)

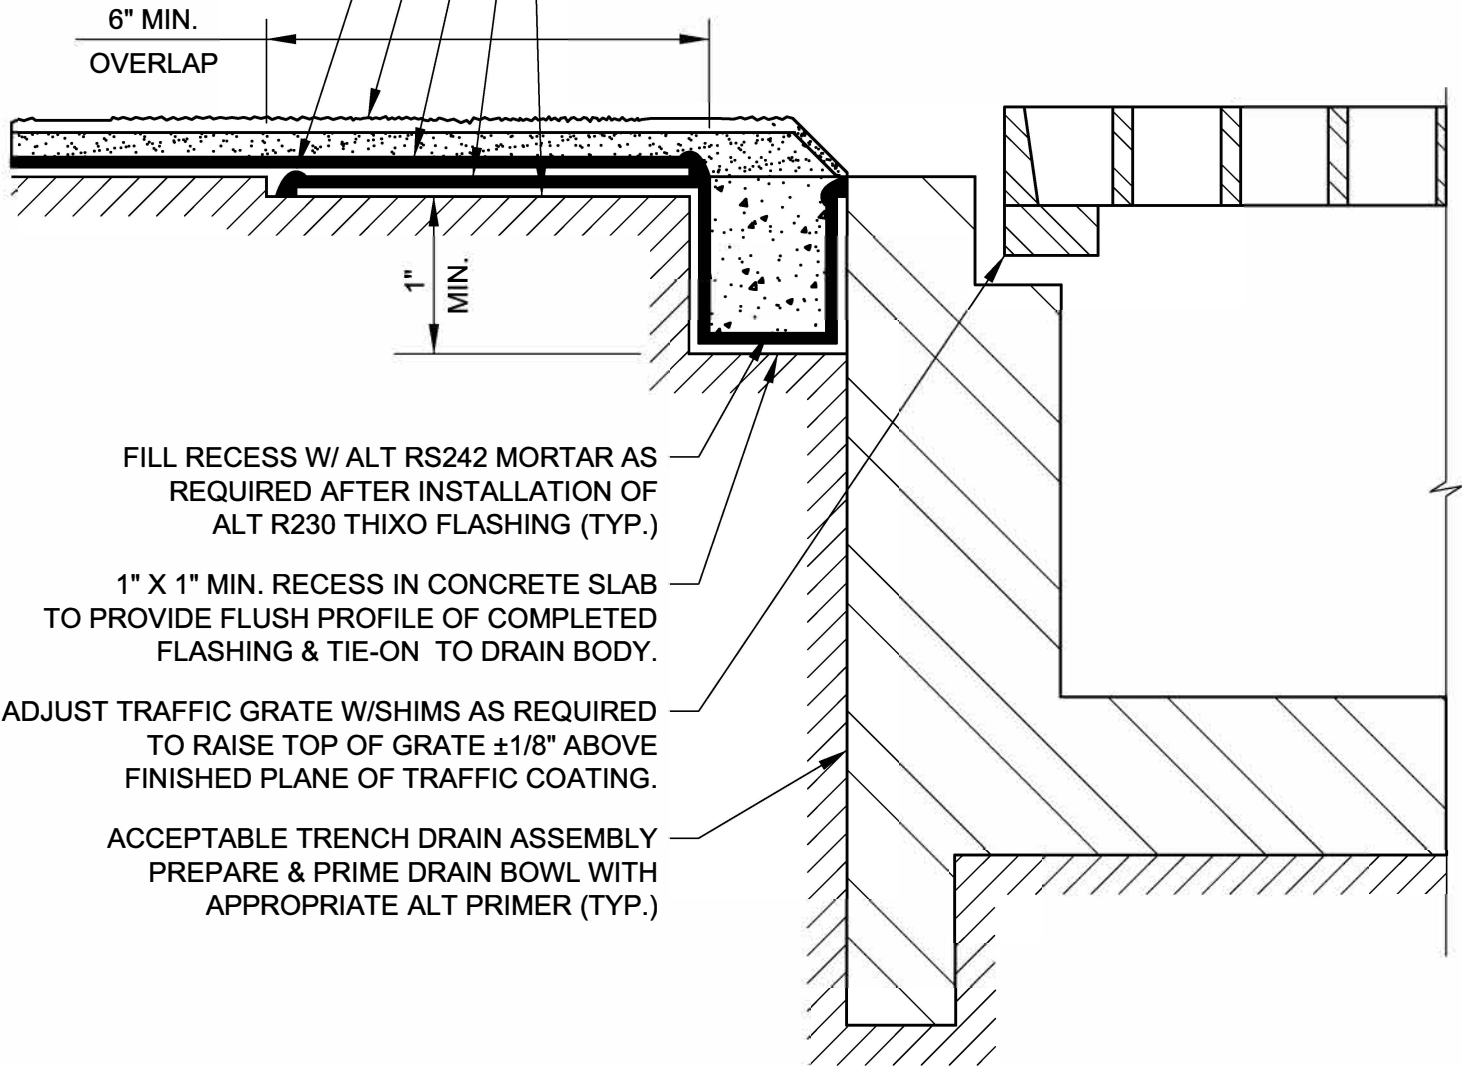

FILL RECESS W/ ALT RS242 MORTAR AS REQUIRED AFTER INSTALLATION OF ALT R230 THIXO FLASHING (TYP.)

1" X 1" MIN. RECESS IN CONCRETE SLAB TO PROVIDE FLUSH PROFILE OF COMPLETED FLASHING & TIE-ON TO DRAIN BODY.

ADJUST TRAFFIC GRATE W/SHIMS AS REQUIRED TO RAISE TOP OF GRATE  $\pm 1/8$ " ABOVE FINISHED PLANE OF TRAFFIC COATING.

ACCEPTABLE TRENCH DRAIN ASSEMBLY PREPARE & PRIME DRAIN BOWL WITH APPROPRIATE ALT PRIMER (TYP.)



### TRENCH DRAIN FLASHING

DRAWING NO.:

# TR-D2

REVISION  
0

ISSUE DATE  
10-15-2014

SCALE  
N.T.S.

DRAWN BY  
ALT Global

TR-D02