


FRONT VIEW

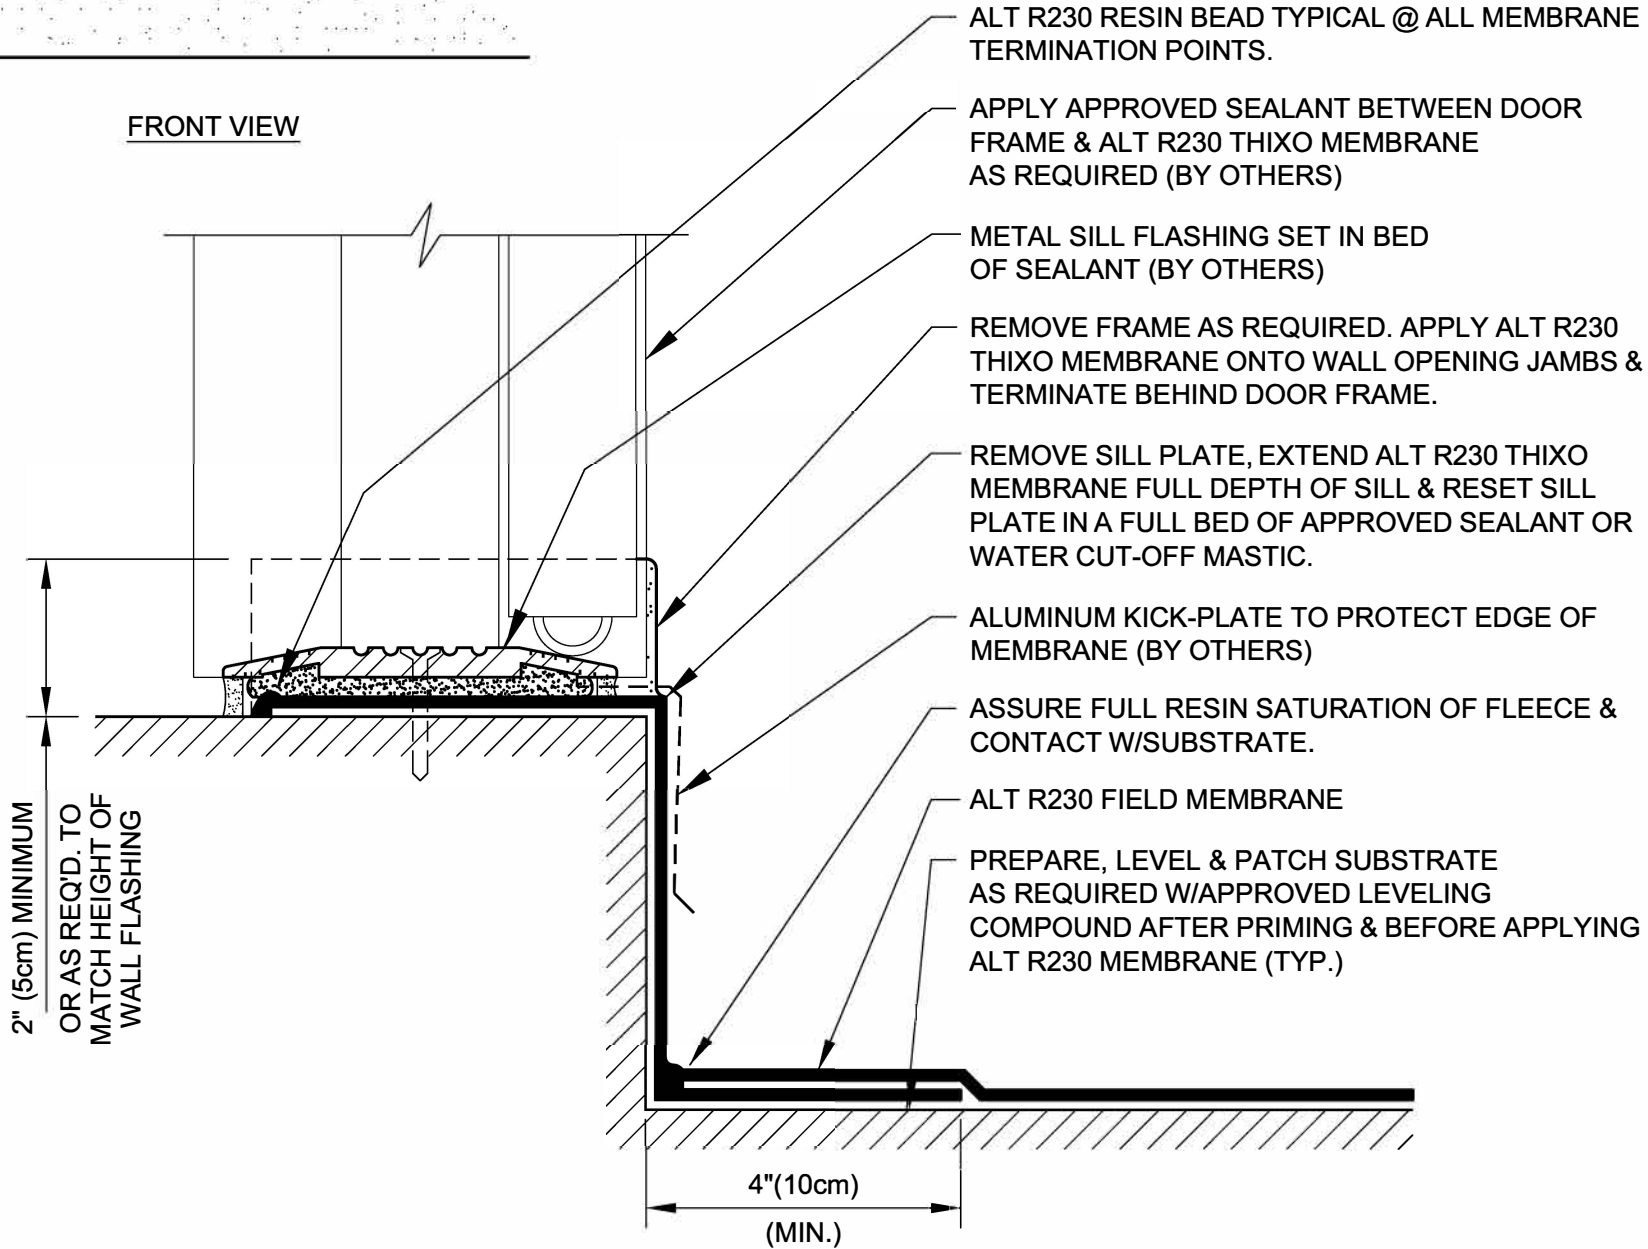

2" (5cm) MINIMUM  
OR AS REQD. TO  
MATCH HEIGHT OF  
WALL FLASHING

4" (10cm)  
(MIN.)

- ALT R230 RESIN BEAD TYPICAL @ ALL MEMBRANE TERMINATION POINTS.
- APPLY APPROVED SEALANT BETWEEN DOOR FRAME & ALT R230 THIXO MEMBRANE AS REQUIRED (BY OTHERS)
- METAL SILL FLASHING SET IN BED OF SEALANT (BY OTHERS)
- REMOVE FRAME AS REQUIRED. APPLY ALT R230 THIXO MEMBRANE ONTO WALL OPENING JAMBS & TERMINATE BEHIND DOOR FRAME.
- REMOVE SILL PLATE, EXTEND ALT R230 THIXO MEMBRANE FULL DEPTH OF SILL & RESET SILL PLATE IN A FULL BED OF APPROVED SEALANT OR WATER CUT-OFF MASTIC.
- ALUMINUM KICK-PLATE TO PROTECT EDGE OF MEMBRANE (BY OTHERS)
- ASSURE FULL RESIN SATURATION OF FLEECE & CONTACT W/SUBSTRATE.
- ALT R230 FIELD MEMBRANE
- PREPARE, LEVEL & PATCH SUBSTRATE AS REQUIRED W/APPROVED LEVELING COMPOUND AFTER PRIMING & BEFORE APPLYING ALT R230 MEMBRANE (TYP.)

DRAWING NO.: **M-2C** AM\_02C

<b>TYPICAL DOOR SILL FLASHING</b>		DRAWN BY <b>ALT Global</b>
REVISION 0	ISSUE DATE 10-15-2014	SCALE N.T.S.