

NOTE:

SIZE WIDTH OF DE-BONDING TAPE TO PROVIDE UN-ADHERED AREA MINIMUM 5 TIMES LARGER THAN THE MAXIMUM ANTICIPATED EXPANSION. MEMBRANE COVER STRIP MUST EXTEND PAST DE-BONDING TAPE 2" MINIMUM ALL SIDES (TYP.)

DO NOT APPLY ALT R268 TEXTURED COATING & FINISH OVER BOND BREAKER (TYP.)

HOLD BACK SURFACING & FINISH 1/2" MIN. BOTH SIDES @ JOINT.

EXPANSION GAP AS REQUIRED.

DE-BONDING TAPE SIZED TO ACCOMMODATE MOVEMENT & CENTERED OVER CONC. JOINT.

6" WIDE MINIMUM ALT R230 THIXO MEMBRANE FLASHING STRIP APPLIED OVER DE-BONDING TAPE & CENTERED OVER JOINT IN CONCRETE (TYP.)


ALT RS233 MORTAR W/BROADCAST AGGREGATE & ALT FINISH 288 OR ALT R268 TEXTURED COATING APPLIED CONTINUOUSLY OVER ALT MEMBRANE WATERPROOFING (TYP.)

ALT R230 MEMBRANE APPLIED CONTINUOUSLY OVER ALT R230 THIXO MEMBRANE FLASHING STRIP @ ALL JOINTS IN CONCRETE (TYP.)

ALT R230 RESIN BEAD TYPICAL @ ALL MEMBRANE TERMINATION POINTS (TYP.)

PREFORMED COMPRESSIBLE FILLER OR BACKER ROD SIZED FOR OPENING.

FILL VOID @ CONCRETE JOINT WITH ALT RS233 MORTAR OR ALT RS242 MORTAR AS REQ'D.

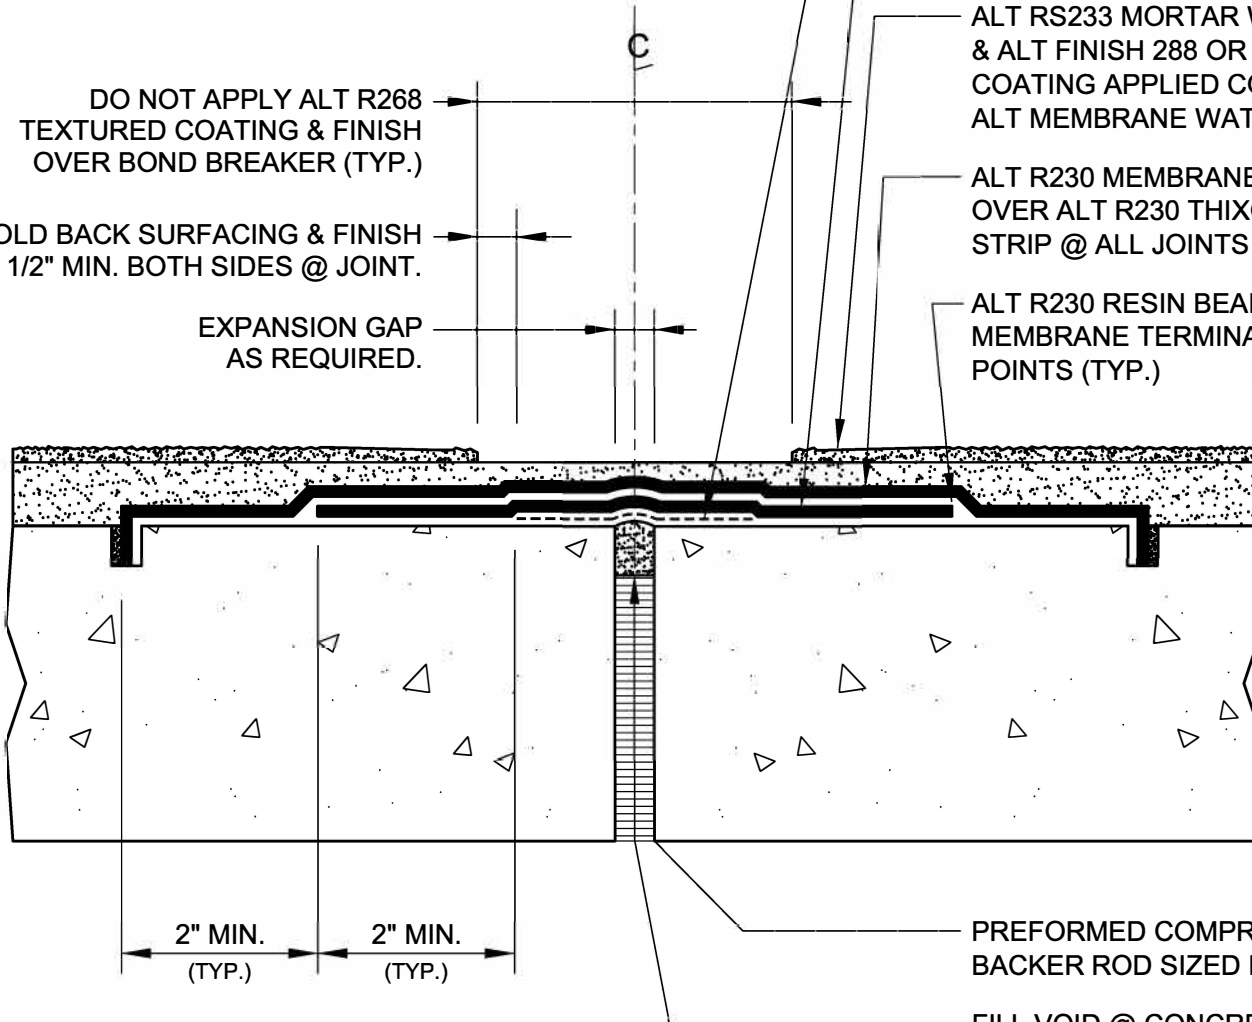

DRAWING NO.:

TN-J4

TN_J04

TRAFFIC CONTROL JOINT FLASHING

REVISION	0	ISSUE DATE	12-15-2014	SCALE	N.T.S.	DRAWN BY	ALT Global
----------	---	------------	------------	-------	--------	----------	------------



ALT