


ISOMETRIC VIEW

EXTEND SURFACE PREP
MAX. 1/8" BEYOND LINE
OF ALT R230 FLASHING &
COVER W/ RESIN BEAD.

8" (20 cm) MIN.

4" (10cm)
(MIN.)

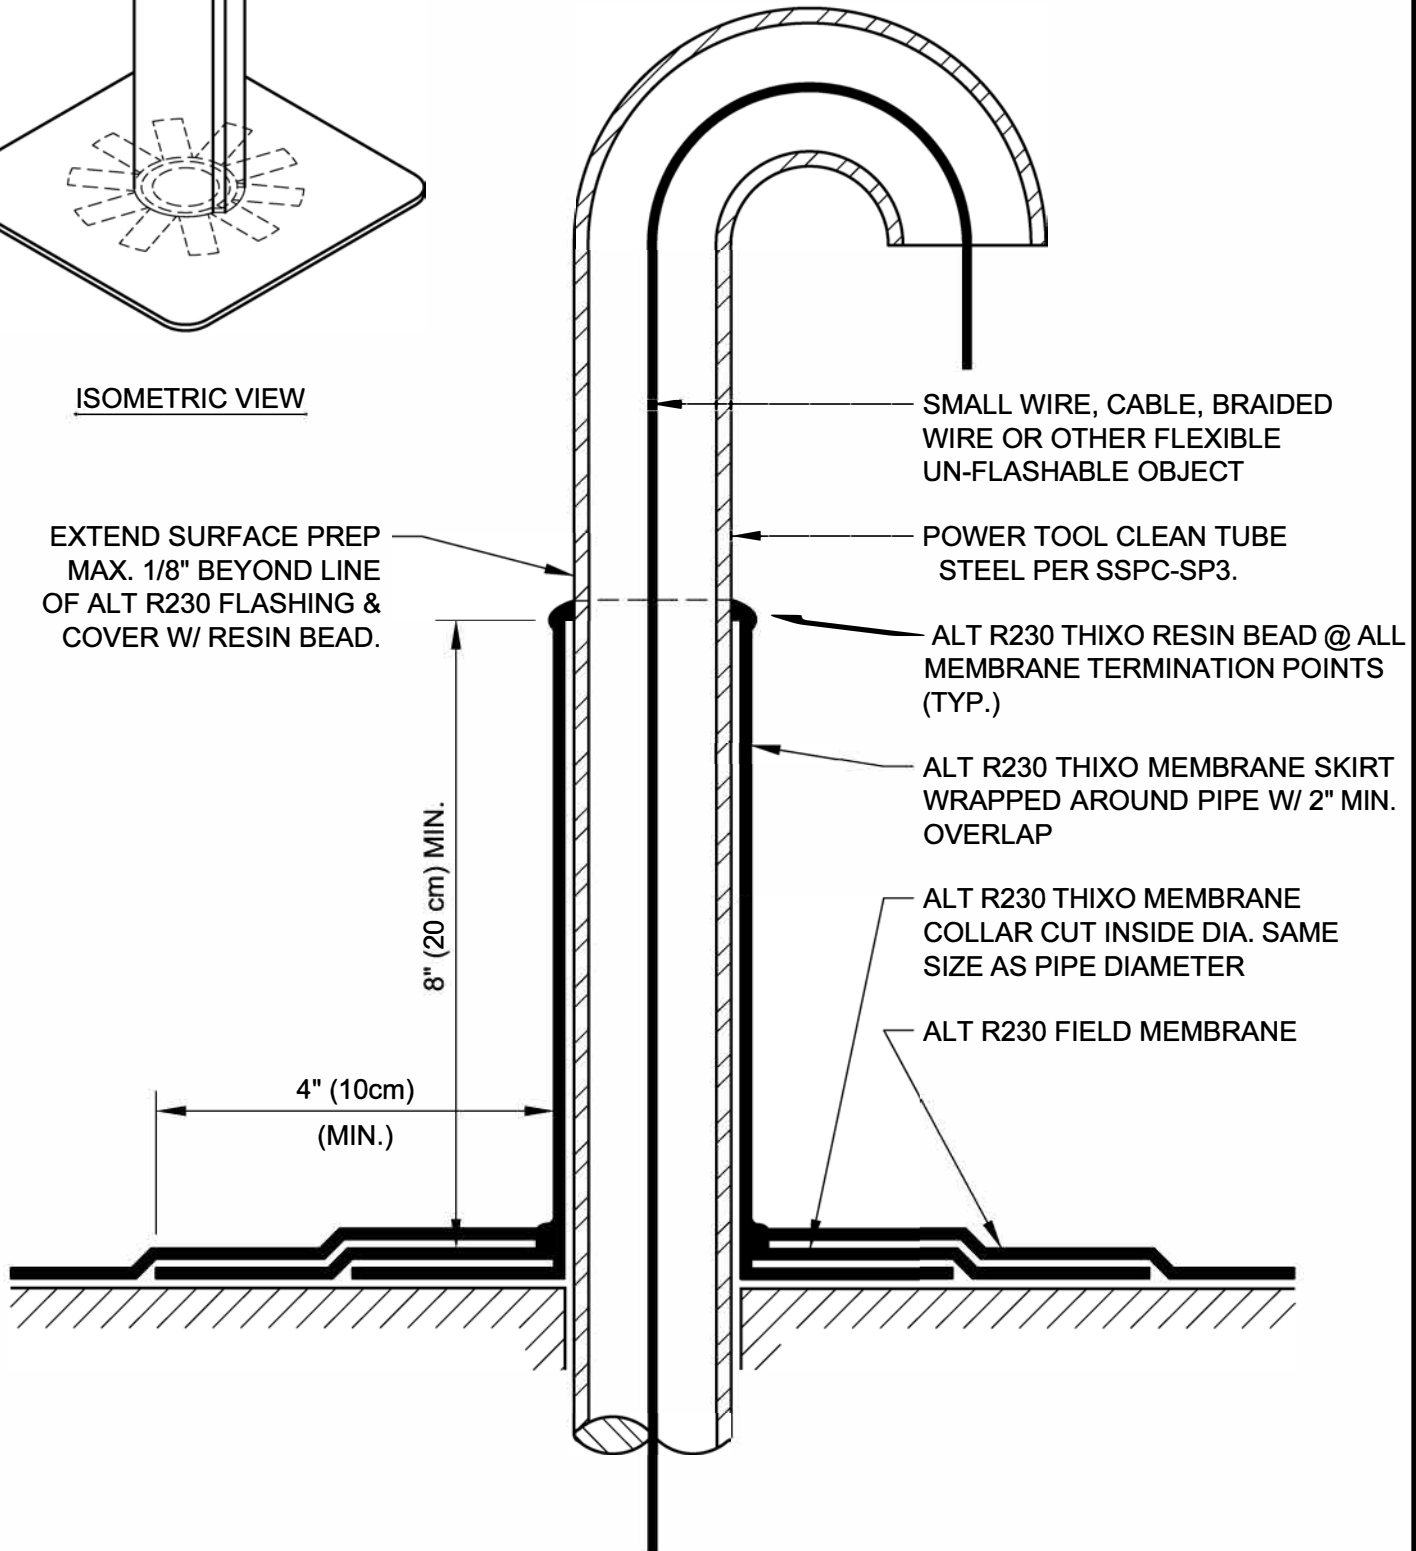

SMALL WIRE, CABLE, BRAIDED
WIRE OR OTHER FLEXIBLE
UN-FLASHABLE OBJECT

POWER TOOL CLEAN TUBE
STEEL PER SSPC-SP3.

ALT R230 THIXO RESIN BEAD @ ALL
MEMBRANE TERMINATION POINTS
(TYP.)

ALT R230 THIXO MEMBRANE SKIRT
WRAPPED AROUND PIPE W/ 2" MIN.
OVERLAP

ALT R230 THIXO MEMBRANE
COLLAR CUT INSIDE DIA. SAME
SIZE AS PIPE DIAMETER

ALT R230 FIELD MEMBRANE

GOOSENECK FLASHING

DRAWING NO.:

P-1C



REVISION
0

ISSUE DATE
10-15-2014

SCALE
N.T.S.

DRAWN BY
ALT Global

AP_01C